


SPECIFICATION SHEET

PRODUCT NO.: 051380

PRODUCT: BODCELL™ Cellular Confinement System

Bodcell Grade		220/200	250/100	250/150	350/100	350/150
Part No		051380	051397	051403	051311	051410
Physical Properties						
Cell nominal diameter	mm	220	250	250	350	350
Cell depth	(1) mm	200	100	150	100	150
Panel length (nominal)	(1) m	6	5	5	5	5
Panel width (nominal)	(1) m	3	7	7	7	7
No of cells in length (L)	(2) No	44	34	34	24	24
No of cells in width (W)	(2) No	14	29	29	20	20
Cell length (nominal)	mm	264	300	300	414	414
Cell width (nominal)	mm	218	265	265	363	363
Colour	(1)	Dark Grey	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Panel weight (nominal)	kgs	20	17	25	11	17
Mechanical/Hydraulic Properties (6)						
Cell wall tensile strength	(3) kN/m	20.7	20.7	20.7	20.7	20.7
Cell junction peel strength	(4) kN/m	10.0	10.0	10.0	10.0	10.0
Cell wall permeability	(5) l/m ² .sec	45	45	45	45	45

- (1) Other sizes and colours are available to order
- (2) See the diagram for an explanation of cell numbering and orientation.
- (3) Results derived from Wide Width Tensile Test (EN ISO 10319)
- (4) Internal Test method
- (5) Results derived from a single cell wall Permeability Test (EN ISO 11058)
- (6) Results quoted are family mean values derived from testing over periods of time.

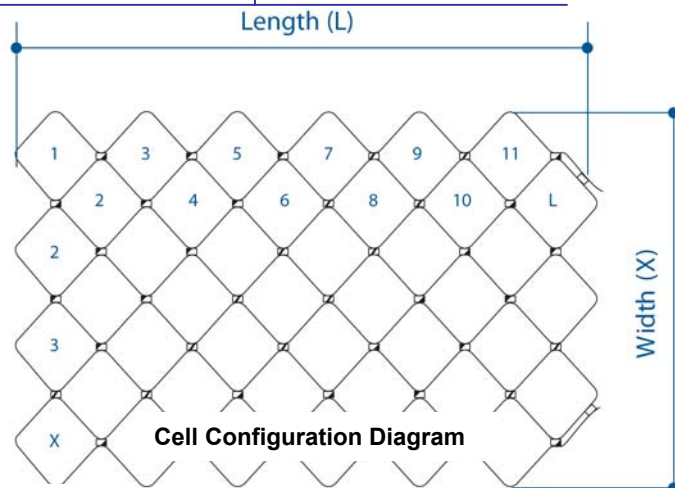

For and on behalf of Boddingtons Limited

Keith Hatley

Quality Manager

SPEC 051380
Issue: 1
Page 1 of 1
Date: 11/06/07

All the above information is given in good faith, but the figures are typical values only and should not be taken as a guarantee of performance. Manufacturing tolerances for dimensional and technical characteristics apply and are available on request. The company reserves the right to improve the product and adjust the specification without notice.



Certificate No. FM 33039