

SPECIFICATION & INSTALLATION GUIDANCE



BODCELL™ GEOCELL CONFINEMENT SYSTEM FOR TREE ROOT PROTECTION

Bodcell™ is a geocellular sub-base confinement system designed for the protection of tree roots where the construction of roads, car parks and access routes are required in the vicinity of trees and where Tree Preservation Orders (TPO) may be enforced. The structure confines and stabilises the sub-base stone ensuring that vehicle loads are dissipated, rutting and soil compaction is prevented and damage to tree roots is avoided. When installed as advised, Bodcell™ will also allow the continued passage and circulation of air, water and nutrients to tree roots to sustain a healthy growing environment as recommended by the following 2 documents:

- British Standard BS5837: 'Trees in Relation to Construction' (2005).
- Arboricultural Advisory and Information Service: Practice Note 1 – 'Driveways Close to Trees' (APN1)


Bodcell™ is supplied flat packed and opens to form a strong geocellular structure. It is simply pinned in place using metal fixing pins as described.

In this type of 'Reduced-Dig' or 'No-Dig' Tree Route Protection application, Bodcell™ is intended for use in conjunction with a water and gas permeable SuDS (Sustainable Drainage System) compliant pavement surface product such as Boddingtons BodPave®85 cellular plastic paving, Concrete Porous Block Paving or Porous Asphalt surfaces. Although Bodcell™ can be used by traffic in isolation for a very limited period when filled; it is not advised that Bodcell™ is used as the permanent surface finish for vehicle access routes. Exceptions may arise where Bodcell™ is installed as a temporary haul road for example as a site access route and may be removed and disposed of or fully re-surfaced after use. Refer to installation method details for further information.

GENERAL INSTALLATION ADVICE FOR ALL APPLICATIONS

Prior to commencing works it is advisable to seek the professional opinion and approval of the Local Planning Department and Arboriculture Officer. Specific design limitations may be determined by Tree Officers, Engineers or Planners and must be closely adhered to. All applications will vary according to the site conditions and specific tree species involved. The ground and tree roots within the tree root protection zone must be protected from compaction and damage at all stages of the construction works. Works may involve varying degrees of excavation or build-up where edge retention is required, which must avoid root damage and soil compaction. The use of mechanical equipment or even low ground pressure machinery in the tree root protection zone must be avoided and hand tools may be the only method of excavation close to the root system.

Bodcell™ Typical Profile

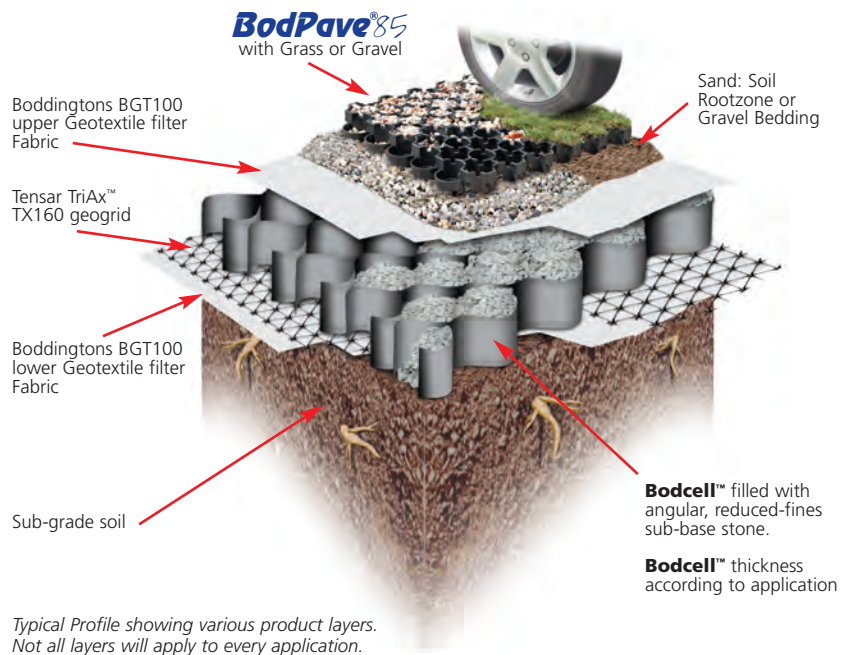

SPECIFICATIONS

PRODUCT	PANEL SIZE	CELL DIAMETER & DEPTH	PANEL WEIGHT	MATERIAL	LOADING APPLICATION	PART No.
Bodcell™ 250/100	5m x 7m	250mm x 100mm	18kg	Non-woven Polypropylene	Pedestrians	051397
Bodcell™ 250/150	5m x 7m	250mm x 150mm	25kg	Non-woven Polypropylene	Cars/Light vehicles	051403
Bodcell™ 220/200	6m x 3m	220mm x 200mm	20kg	Non-woven Polypropylene	HGV's	051380

PRODUCT	MATERIAL	SIZE	UNIT	PART No.
Fixing J-Pin	Steel rod	550mm long x 8mm dia	Each	051038

Bodcell™

INSTALLATION METHOD FOR PERMANENT ACCESS ROUTES AND CAR PARKS

1. Obtain the approval of the Local Planning Department and Arboriculture Officer that this method of construction is appropriate and acceptable for the application and to determine the limits of construction and proximity to the tree.
2. Prepare the site by carefully removing all debris and reducing surface levels to the allowable reduced dig as appropriate to the specification, whilst strictly avoiding soil compaction and tree root damage. Build-up directly on the existing surface levels may be necessary.
3. Ensure that the prepared surface is reasonably even and fill any localised depressions with sharp sand to achieve an even surface profile. Do not roll or consolidate the area.
4. Install tanalised timber edging boards or other approved edge retention to the perimeter of the construction zone as appropriate to the total layer profile thickness. Avoid damage to tree roots when placing fixing posts and pegs. Concrete kerbs are unlikely to be appropriate or allowed.
5. Install a layer of Boddingtons BGT100 Geotextile Fabric across the site, overlapping adjacent rolls by a minimum of 150mm. It may be necessary to lightly pin the Geotextile in place until the overlying layers are installed.
6. An optional layer of Tensar TX160 TriAx™ Geogrid may be required at this stage, possibly determined by the site soil strengths (i.e. weak CBR% strength*), the proposed application and applied load such as HGV's. In some cases the TX160 layer may also aid the reduction of the required layer thickness of Bodcell™ where an extremely limited allowable excavation or build-up has been applied. Place the Geogrid layer over the Geotextile Fabric layer and fix down using steel pins to hold flat. Overlap adjacent rolls by minimum 150mm. Avoid tree root damage and soil compaction.
7. Open out and lay the specified layer thickness of Bodcell™ (100mm/150mm/200mm deep) and pin in place between the edging boards. It may be necessary to cut the Bodcell™ to size using a sharp knife or it can be left uncut and folded up against the edgings if preferred.
8. Pin the Bodcell™ in place using Boddingtons Steel Fixing Pins or similar approved. The pins are generally used to maintain the cells in an open and fully expanded position whilst the cells are being filled and also to stop the structure from being pushed up by migrating aggregate during the filling process. Pin spacing will vary according to the site conditions, but will generally be required at 1m – 2m centres on flat surfaces, mainly placed around the perimeter of the area and where adjacent sections of Bodcell™ abut each other, with less in the middle of the area. Drive the pins in so that they are just touching the top of the cells but do not compress the fabric. Avoid tree root damage during the pinning process.
9. Fill the Bodcell™, working toward the tree from the furthest point away and using the filled Bodcell™ as a platform. The cells must be filled with clean, open graded angular aggregate, normally in the particle size range of 5mm - 45mm. Not single sized or rounded aggregate. The project engineer may determine alternative fill materials such as clean 4/20 or 4/40 stone or a reduced-fines DoT Type 1X sub-base. It is not acceptable to use a standard DoT Type 1 Sub-base within the cells for tree root protection. Do not roll the surface, a light vibratory compaction plate (whacker) may be permitted to settle the stone into the cells, seek advice from the specifier or Tree Officer on this detail. Do not contaminate the filled cells with site debris, soil or mud.
10. Install the permeable pavement layer/wearing course i.e. BodPave®85, Block Paving, Porous Asphalt, on top of the Bodcell™ according to the manufacturers recommendations. Each porous pavement layer will have a specific design layer requirement; therefore for example, where a sand or sand:soil bedding layer is specified or a contaminant filtration layer is required, then a layer of Boddingtons BGT100 Geotextile Fabric shall be placed above the Bodcell™ prior to the pavement bedding layer being installed and finished according to manufacturers instructions. The Geotextile will stop the pavement bedding layer from migrating down into the aggregate voids within the Bodcell™.


For installation recommendations for BodPave®85 cellular paving for Grass & Gravel, refer to Boddingtons BodPave®85 Specification and Installation Guidance Notes. For all other pavement layer products, refer to the specific manufacturers' guidance.

INSTALLATION METHOD FOR TEMPORARY ROADS AND SACRIFICIAL PAVEMENT LAYERS IN HAUL ROADS

In some applications Bodcell™ may be installed as a temporary haul road base and completely removed after use. Alternatively it may have a sacrificial stone layer placed over it which is removed and replaced with a permanent permeable pavement solution when use of the haul road is complete.

1. Obtain the approval of the Local Planning Department and Arboriculture Officer that this method of construction is appropriate and acceptable for the temporary access and to determine the limits of construction and proximity to the tree.
2. Apply all construction detail as for items 2 to 9 above for 'Permanent Access Routes'.
3. Place a layer of Boddingtons BGT100 Geotextile or greater strength Geotextile (i.e. Terram 2000) onto the Bodcell™ surface. The geotextile grade will be determined by the specific site design criteria and degree of haul road traffic proposed. This layer will be removed and replaced later if a porous pavement surface is being installed on the Bodcell™.
4. Place a minimum 100mm thick layer of either clean graded stone or DoT Type 1 sub-base stone onto the surface. This will be the sacrificial pavement layer to be removed later. Aggregate specification will be determined by the project manager.
5. During use of the access route, routinely check for erosion of the surface and repair with stone as required to avoid exposure of the geotextile.
6. After the haul road use is completed, remove the sacrificial layer of stone and geotextile and replace with the preferred permeable pavement layer in accordance with manufacturers recommendations. Alternatively remove the entire construction profile to return the site to its original status. It is critically important to avoid contamination of the remaining layer of open-graded stone within the Bodcell™ where partial removal is carried out and at all times to avoid damage to tree roots and soil compaction during removal and disposal of the construction layers.
7. Where complete removal of Bodcell™ is required, seek the specifiers' advice on renovation and restoration of the landscaped surfaces within the tree protection zone.

Typical Profile Construction

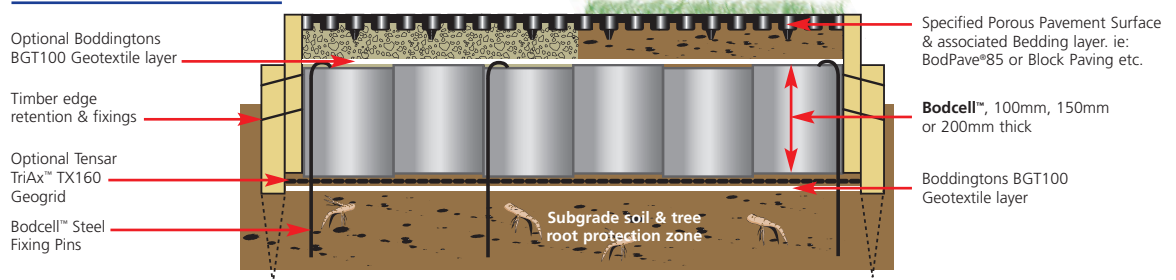

Other useful notes on Tree Root Protection

- In most applications the total porous pavement area should not exceed 20% of the tree root protection area.
- It is advisable to seek an Engineers advice on the required Bodcell™ layer thickness related to local soil strengths and proposed traffic loadings.
- Soil compaction will severely affect the trees ability to take up water and oxygen; similarly, raising soil levels around trees will deprive roots of oxygen and cause stress and dieback.
- In most cases 80% - 90% of a trees root system are in the upper 1m of soil and the small fibrous tree roots are the most important to a trees health. The fine roots enable transport of oxygen, water and nutrient to the tree via the larger roots which also anchor the tree and provide stability. Severing only a small proportion of the fine surface root structure can severely affect the tree, causing stress, dieback and loss of stability.

* CBR% Strength = California Bearing Ratio – a measure of subgrade soil strength.

Further Reading

- British Standard: BS5837 1991 / 2005 – Trees in Relation to Construction - Recommendations.
- Arboricultural Advisory and Information Service: Practice Note 1 – 'Driveways Close to Trees' (APN1).
- 'Tree Root Systems'. (M. Dobson 1995) – Arboricultural Research Information Note 130/ARB/95.
- 'Driveways Close to Trees' (M. Dobson / D. Patch 1996). Arboricultural Practice Note 1.
- 'Guidance for Trees: Conflict or Compliment?'. (R. Nicholson 2001). Arboricultural Journal No. 25.

Please note that the information above is given as a guide only. Boddingtons cannot be liable for damage caused by incorrect installation of this product. Final determination of the suitability of any information or material for the use contemplated and the manner of its use is the sole responsibility of the user and the user must assume all risk and responsibility in connection therewith.

Tensar and Tensar TriAx™ are registered trademarks of Tensar International. BodPave® is a registered trademark of Boddingtons Limited



Certificate No. FM 33039

Blackwater Trading Estate • The Causeway • Maldon • Essex CM9 4GG • England
 Tel: +44 (0) 1621 874200 Fax: +44 (0) 1621 874299
 e.mail: sales@boddingtons-ltd.com • www.grass-reinforcement.com

