


## Detectable Tape



Wavelay™ is manufactured using one or more stainless steel tracer wires laid in a sinusoidal wave pattern and laminated between two layers of low density lead free virgin grade rot resistant polyethylene. Used with standard cable and pipe locators for the location of non-metallic pipes and un-energised cables. Laid halfway between the pipe or cable and the surface of the trench during backfilling.

- Unique design allows wires to stretch by over 25% before breaking.
- Top 'Printguard' layer protects the wires and the warning message.
- Detectaccessories available for joining detectable wires
- Other texts/colours manufactured to order

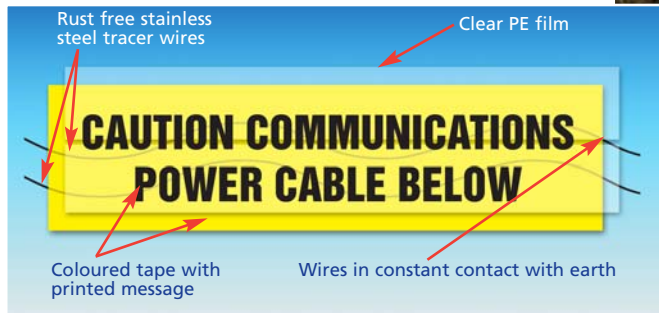

## Technical Specifications

| TEXT/COLOUR                                 | SIZE         | PART NO. |
|---|--------------|----------|
| CAUTION COMMUNICATIONS<br>POWER CABLE BELOW | 150mm x 100m | 015986   |

- Special manufacture available in any colour, size, text or language to your specifications

## Detectaccessories

To ensure a continuous signal along the mesh it is important to use our wire crimps and crimping tool. This gives the join sufficient strength to cope with most back fills. If it is not installed correctly then the signal may not pass from join to join.

## Technical Specifications

| PRODUCT                     | QUANTITY PER PACK | PART NO. |
|-----------------------------|-------------------|----------|
| Crimping Tool               | 1                 | 043385   |
| Stainless Steel Wire Crimps | 100               | 043347   |



Copyright © Boddingtons Ltd. All rights reserved